

## *PiE AIR SUPER LIGHT 190+*

*190 W 18 V BLK/TRNS*



### **SUPER LIGHT**

GLASS-FREE AND FRAMELESS, NEVERTHELESS ROBUST SOLAR MODULE DUE TO ETFE WITH A NET WEIGHT OF 2.90 KG



### **EASY TO FIT**

16 LONG HOLES FOR EASY AND UNIVERSAL USAGE



### **HIGH PERFORMANCE**

USAGE OF SPECIAL MONOCRYSTALLINE SOLAR CELLS TO ABSORB THE MAXIMUM OF SUNLIGHT AND CONVERT INTO ENERGY




### **WARRANTY**

6 YEARS PRODUCT WARRANTY

25 YEARS LINEAR PERFORMANCE WARRANTY (81% POWER ASSURANCE)

Type	PiE AIR SUPER LIGHT 190+
Maximum Power (Pmax)	190W+
Maximum Power Voltage (Vmp)	18.00V
Maximum Power Current (Imp)	10.83A
Open Circuit Voltage (Voc)	21.6V±3%*
Short Circuit Current (Isc)	11.9A±3%*
Power temperature coefficient	- 0.045%/°C
Voltage temperature coefficient	- 0.33%/°C
Current temperature coefficient	- 0.05%/°C
Power Selection	0~5W
Maximum System Voltage	IEC 1500V
Module Efficiency (%)	> 19,1 %
Certification	CE – RoHS – ISO



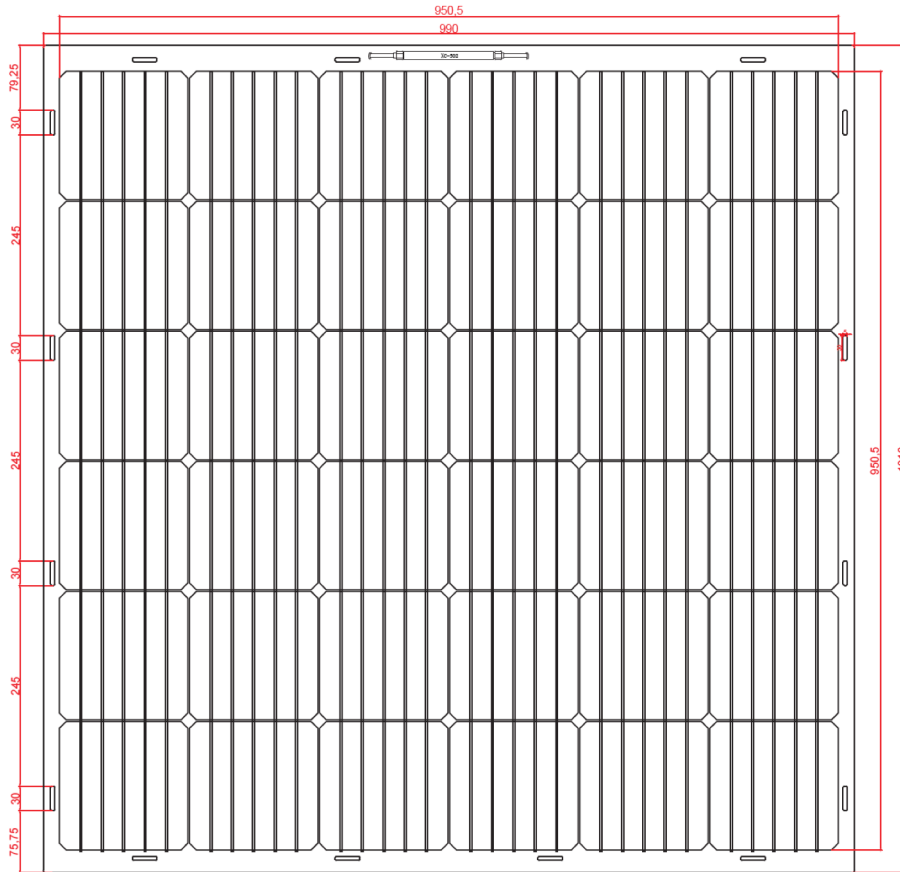

**SIZE:** 1010 x 990 x 3.5

