

PiE AIR ULTRA LIGHT 330+

330 W 34 V BLK/TRNS



SUPER LIGHT

GLASS-FREE BUT NEVERTHELESS ROBUST SOLAR MODULE DUE TO ETFE WITH A NET WEIGHT OF 8.2 KG



UNIVERSIAL USAGE

LIMITLESS APPLICATION POSSIBILITIES EVEN AT HIGH LEVELS DUE TO GLASS-FREE DESIGN



HIGH PERFORMANCE

USAGE OF SPECIAL HALF-CELL MONOCRYSTALLINE SOLAR CELLS TO ABSORB THE MAXIMUM OF SUNLIGHT AND CONVERT INTO ENERGY







WARRANTY

10 YEARS PRODUCT WARRANTY
 25 YEARS LINEAR PERFORMANCE WARRANTY (81% POWER ASSURANCE)

Type	PiE ULTRA 330+
Maximum Power (Pmax)	330W+
Maximum Power Voltage (Vmp)	34.30 V
Maximum Power Current (Imp)	9.63 A
Open Circuit Voltage (Voc)	41.16 V ± 3%*
Short Circuit Current (Isc)	10.11 A ± 3%*
Maximum Series Fuse	20 A
Number of Cells	120
Power Selection	0 ~ 5W
Maximum System Voltage	IEC 1000V
Module Efficiency (%)	> 19,60 %
Certification	CE – RoHS – ISO
Standard Test Conditions	Irr:1000 W/m ² Temp: 25°C AM:1.5



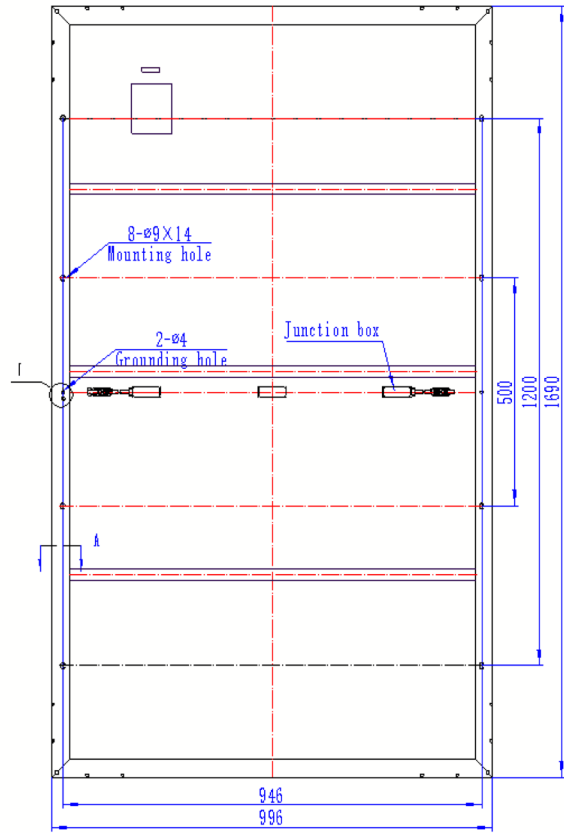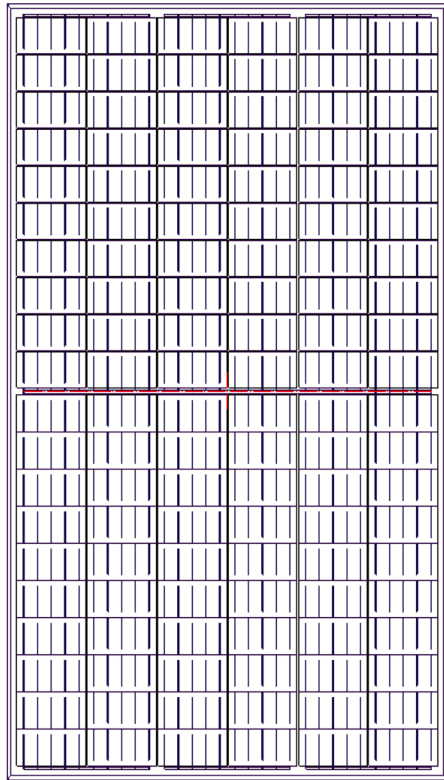

SIZE: 1690 x 996 x 35 x 35

