

## *PiE ULTRA LIGHT 350+* *350 W 34 V BLK/TRNS*



### **SUPER LIGHT**

GLASS-FREE BUT NEVERTHELESS ROBUST SOLAR MODULE DUE TO ETFE WITH A NET WEIGHT OF 8,8 KG



### **UNIVERSIAL USAGE**

LIMITLESS APPLICATION POSSIBILITIES EVEN AT HIGH LEVELS DUE TO GLASS-FREE DESIGN



### **HIGH PERFORMANCE**

USAGE OF SPECIAL HALF-CELL MONOCRYSTALLINE SOLAR CELLS TO ABSORB THE MAXIMUM OF SUNLIGHT AND CONVERT INTO ENERGY




### **WARRANTY**

10 YEARS PRODUCT WARRANTY

25 YEARS LINEAR PERFORMANCE WARRANTY (81% POWER ASSURANCE)

Type	PiE ULTRA 350+
Maximum Power (Pmax)	350W+
Maximum Power Voltage (Vmp)	34.30 V
Maximum Power Current (Imp)	10.21 A
Open Circuit Voltage (Voc)	41.16 V ± 3%*
Short Circuit Current (Isc)	10.72 A ± 3%*
Maximum Series Fuse	20 A
Number of Cells	120
Power Selection	0 ~ 5W
Maximum System Voltage	IEC 1500V
Module Efficiency (%)	> 19,60 %
Certification	CE – RoHS – ISO
Standard Test Conditions	Irr:1000 W/m <sup>2</sup> Temp: 25°C AM:1.5



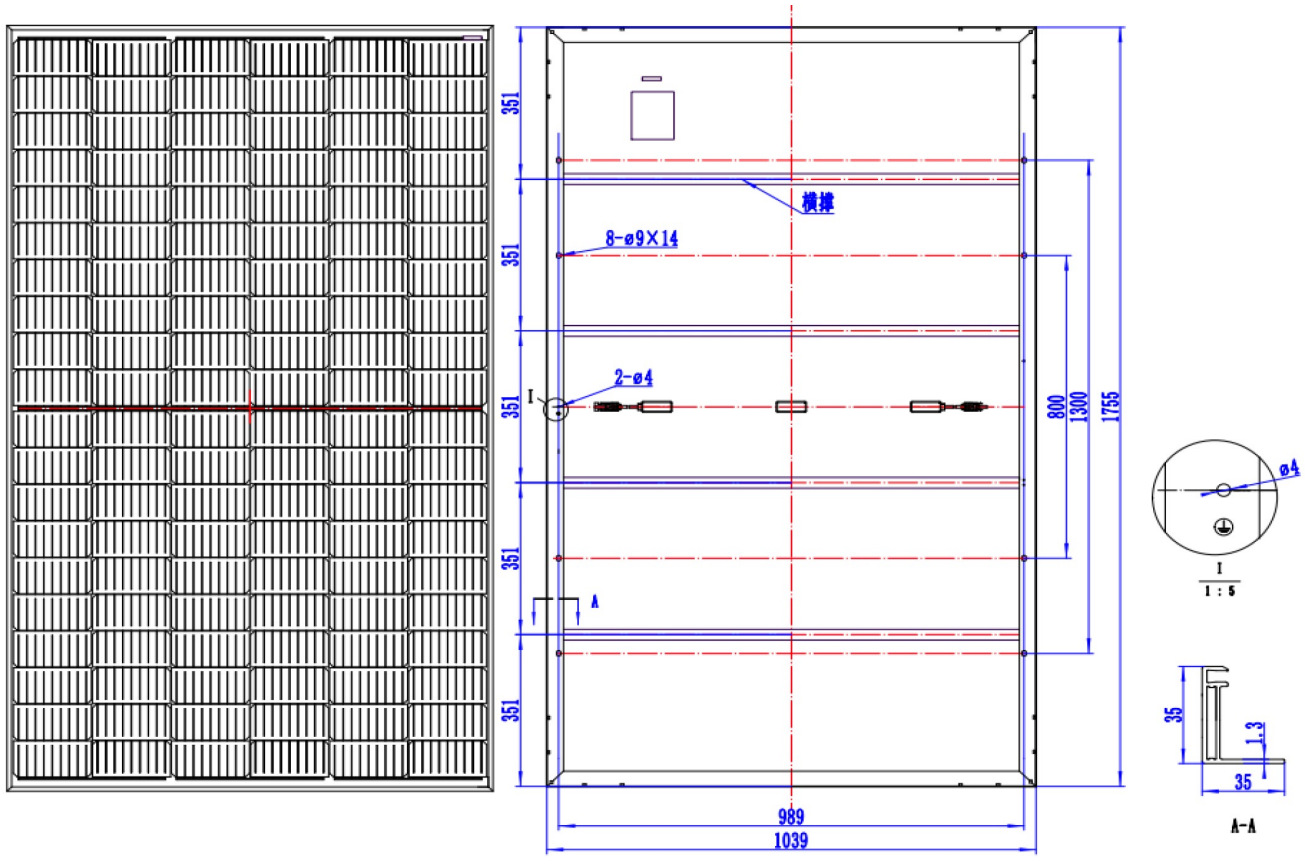

**SIZE:** 1755 x 1039 x 35 x 35

